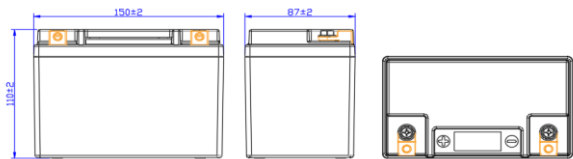



**摩托车启动锂离子电池 HJTZ14S-FPZ**  
**Lithium Battery for Motorcycle Start HJTZ14S-FPZ**

	SIZE : L 150mm x W 87mm x H 110mm 
--	---

**性能参数 Specification**

额定电压 Nominal Voltage	12V	
额定容量 Nominal Capacity	8.0Ah	
重量 Weight	Approx.1.5kg	
充电电压 Charging Voltage	14.4±0.5V	
充电电流 Charging Current	STD.: 4.0A; MAX.: 32.0A	
高倍率放电 High Rate Discharge (160A,25C°)	5s Voltage ≥10.0V, 90s Voltage ≥7.2V	
高倍率放电 High Rate Discharge (160A,-10C°)	5s Voltage ≥7.2V, 30s Voltage ≥7.2V	
BMS Protection	Over charge protection; Over discharge protection	
CCA Tested by Digital Tester: (A)	400	
操作温度 Operating Temperature	充电 Charge	0~45C°
	放电 Discharge	-10~60C°
	储存 Storage	-20~40C°
循环寿命 Cycle Life	≥1000 (100%DOD, 25C°)	
自放电 Self Discharge	25C°下可储存1年以上（温度越高时间越短），使用前检查电池电压，若电压低于12.8V需补充电 Battery can be stored for more than 12 months at 25C° (for higher temperature the self discharge will be faster). Check the battery voltage before using, recharge it if battery voltage less than 12.8V.	

**充电曲线 Charge Characteristic**      **循环寿命曲线 Cycle Life Feature**

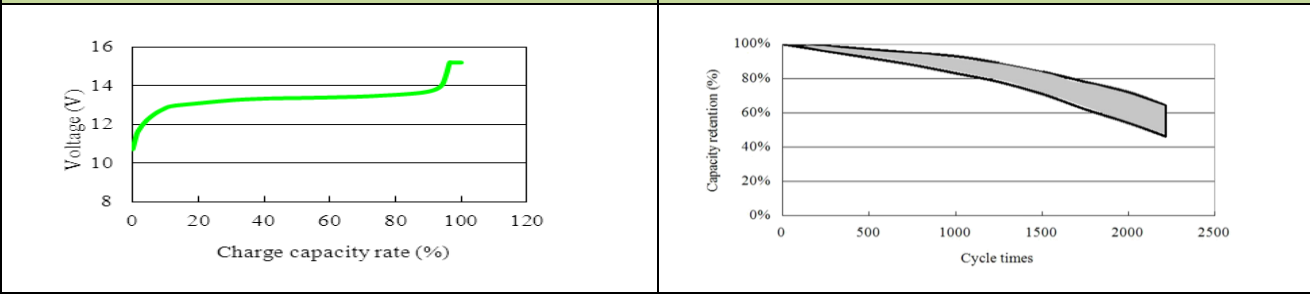

**工厂证书 Certificates**      **IATF16949; ISO9001; IS14001; ISO18001**

**产品证书 Product Certificate**      **UL1642 cell inside; CE; RoHs; UN38.3**